


## Static mixers – MIXPAC™ MSR mixers (rotating)

### Technical Data



STATOMIX™ MSR Series plastic disposable rotary mixers are suited for mixing low viscosity 2-component reactive resin systems. The first mixing element is provided with a hole for attachment to the dispensing head driveshaft. MSR Series mixers are provided with stepped ends which can be cut to increase the outlet diameter.

<b>Outer Housing</b>	Polypropylene	<b>Elements</b>	Polyacetal
<b>Retaining Method</b>	Nut 7/8" – 9 UNC thread or Nut 7/8" – 14 UNF thread	<b>Color of elements</b>	MSR mixer: green

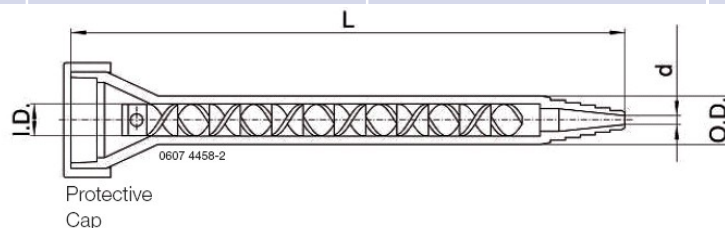

Part Numbers	Inside Dia. I.D. (mm)	Number of Elements	Outside Dia. O.D. (mm)	Length L (mm)	Nozzle Dia. A (mm)	Max. Pressure (bar)
MSR 06-12T	6.4	12	10	111.5	1.9	30
MSR 08-12T	8.0	12	12	130.0	2.4	27
MSR 10-12T	10.0	12	14	155.0	3.0	22
MSR 13-12T	13.0	12	17	197.0	4.0	17

### Contact:

Siko BV  
Winkelskamp 1

7255 PZ Hengelo (gld)  
The Netherlands

Tel: +31 (0)575 46 20 25  
Fax: +31 (0)575 46 10 87

E-Mail: [info@sikobv.nl](mailto:info@sikobv.nl)  
Internet: [www.sikobv.nl](http://www.sikobv.nl)